

General Instructions For Rocky and Bullwinkle Pinball Machine Mods

(Not all of these items may have come with the set you purchased)

Please note, not all games will have the same exact procedures due to how games are assembled and how people have made changes to them over the years. As with most types of plastics, do not force or bend the plastic pieces/tabs or they may break. If this happens, plastic cement (such as Testors in the red tube) can easily repair the part.

White Roman Column

Notes:

- Use existing screw



Bomb Acorn Nuts


Notes:

- Make sure not to over tighten or you may strip the threads. But if this does happen, just wrap a piece of masking tape (about 1/8" x 3/4" strip) clockwise around the post threads. The bombs will be nice and snug again.

Hat Flasher Cover

Notes:

- Take apart the two flashers/covers in corner
- Remove second flasher since only one is used
- Attach hat using screw/nut from old flasher
- If you need to lift the playfield in the future, remember to pull the playfield forward a little so the cabinet does not hit the hat.

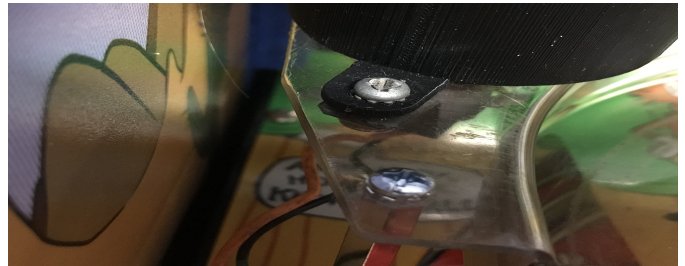

Right Ramp Entrance Cover Bomb

Notes:


- Unplug light and remove
- Unscrew 2 screws holding ramp switch on left
- Install bomb in front of ramp with the right lower bracket around the lower post (see picture)
- Install left side items in the following order (see picture): 2 screws, small rectangular bracket, bomb bracket and ramp switch to existing bracket with the threaded holes
- Make sure switch and gate are properly installed and the gate moves freely
- Tighten screws and attach new light wires to either plug socket



Left Ramp Entrance Cover WABAC Machine

Notes:

- Unplug light and remove
- Unscrew 2 screws holding ramp switch on left
- Remove 2 nuts from front bumpers by targets
- Install WABAC on ramp with the front brackets aligning with screws from the previously removed nuts (see picture)
- Install left side items in the following order (see picture): 2 screws, small rectangular bracket, WABAC bracket and ramp switch to existing bracket with the threaded holes
- Make sure switch and gate are properly installed and the gate moves freely
- Tighten screws and attach new light wires to either plug socket
- Reinstall front nuts on the two bumper posts

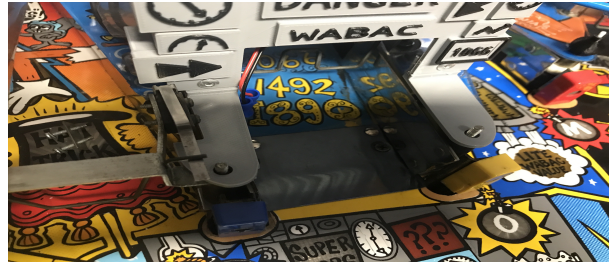

Thank you for your purchase and I hope you enjoy your game and my mods. If you have any questions, problems or suggestions for this or other mods, please email me directly at ThePinballDaddy@gmail.com